




Typical Section

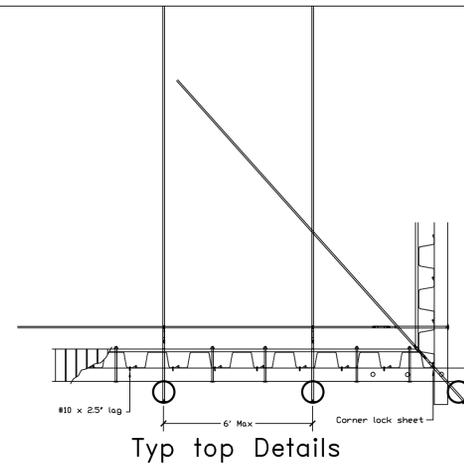


Typ top Details

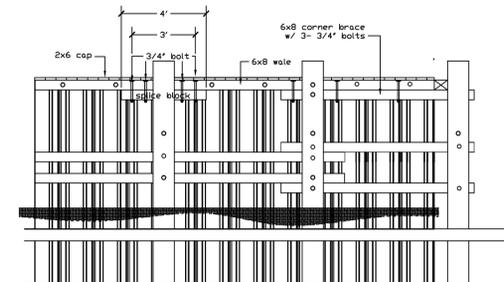

Typical Face Detail

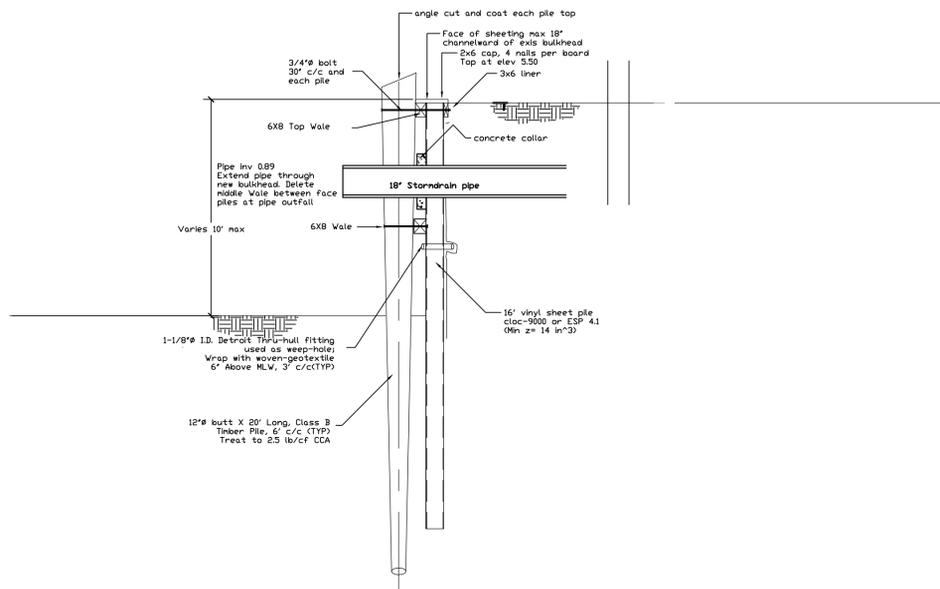

Section at Storm Drain

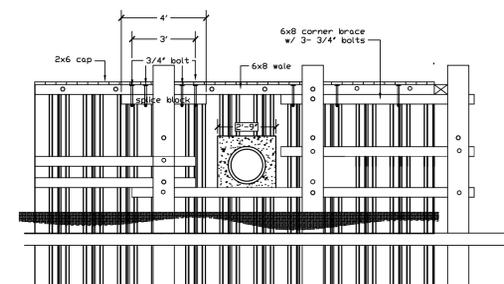

Face at Stormdrain

General Notes

- 1: ALL HARDWARE AND TIMBER IN ACCORDANCE WITH TOWN OF OCEAN CITY MINIMUM PORT WARDENS STANDARDS.
- 2: ALL HARDWARE HOT DIPPED GALVANIZED AFTER FABRICATION
- 3: ALL TIMBER TREATED TO 2.5LB/CF CCA UNLESS OTHERWISE NOTED.
- 4: ANCHORS ARE TO BE INSTALLED USING METHODS AND EQUIPMENT AS APPROVED BY THE MANUFACTURER. LOAD EACH ANCHOR AS SPECIFIED AND PROVIDE WRITTEN REPORT OF LOADING TO THE ENGINEER.
- 5: VINYL SHEET PILE TO BE INSTALLED USING METHODS AND EQUIPMENT AS APPROVED BY THE MANUFACTURER.
- 6: STORM DRAIN PIPE MATERIAL WILL BE PROVIDED BY THE TOWN OF OCEAN CITY. PIPE INSTALLATION, CONCRETE SEAL AND ALL FORMWORK TO BE FURNISHED AND INSTALLED BY BULKHEAD CONTRACTOR.

No.	Revision/Issue	Date

Firm Name and Address  
**TOWN OF OCEAN CITY**  
**ENGINEERING DEPT,**  
**301 BALTIMORE AVE.**  
**OCEAN CITY, MD 21842**  
**(410)289-8845**

Project Name and Address  
**PUBLIC WORKS**  
**POLE BARN BULKHEAD**  
**DETAILS**  
**OCEAN CITY, MD 21842**

Project  
**DPW BH DETAIL**  
 Date  
**DEC 16, 2014**  
 Scale  
**1/4" = 1'**

Sheet  
**2**